


The role of district heating in decarbonization: insights from the case study on Helsinki region, Kaunas and Warsaw

Professor Sanna Syri, Energy Technology and Energy
Economics

Aalto University

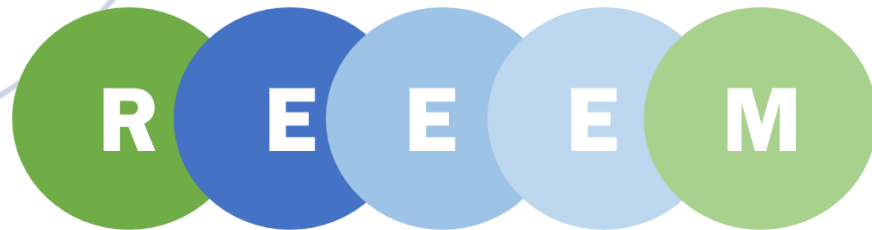

This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 691739.

District heat (DH) can support the energy system transition

- Use of local biomass & waste fuels in heating
- Provide balancing to the system when wind power and solar power are increasing
 - Heat storages
 - Use of either heat pumps or CHP plants, depending on the electricity market situation
- In all these cities, DH is very energy efficient and an essential part of the energy system



REEEM work in district heating

- Energy system models were used:
 - MESSAGE for Kaunas modelling (LEI)
 - EnergyPRO for modelling of Helsinki region (Helsinki, Espoo and Vantaa) and Warsaw (Aalto)
- TIMES Pan-EU results were interpreted to city-level
 - TIMES Pan-EU (Stuttgart University) produces cost-optimal solutions at country-level to meet the specified CO₂ emission targets by 2050
 - These scenario results were combined with the actual existing city-level targets and policies
- Also changes in heat demand due to climate change were included, modelled by DTU/Denmark.



Case Kaunas

- Second-largest DH system in Lithuania (approx. 1.4 TWh per year)
- Dominated by biomass (90% in 2017*)
- High penetration of independent heat producers**
 - Number of independent heat producers: 9 (+2 in Kaunas region)
 - Heat generation capacity at independent heat producers: 1409.69 MW
 - Average heat generation capacity demand in the system: 151.2 MW
 - Average heat capacity supply of independent heat producers: 108.3 MW
- A new waste to energy CHP (24 MW_e and 70 MW_{th}) is being built

* Data source: http://lsta.digiart.lt/wp-content/uploads/2019/01/2017-WEB_Final.pdf

** Data source: https://www.regula.lt/SiteAssets/naujienu-medziaga/2019/NSG_apzvalga_2018_metai.pdf



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 691739.




Studied DH scenarios in Kaunas

- BAU
 - No emission limitation
- C-Free
 - Linear decrease of CO₂ emissions from current level to zero in 2050
- In both scenarios:
 - Optimal investment decisions and operation scheduling is allowed
 - Operation of all existing technologies is allowed during their technical life time.
 - Rebuilding of existing technologies after end of their technical life time, extension of their capacities, construction of a new Waste-to-Energy CHP, electrical and steam-driven absorption heat pumps, solar collectors, heat storages are considered among new candidate heat producing technologies.



Modelling results for Kaunas

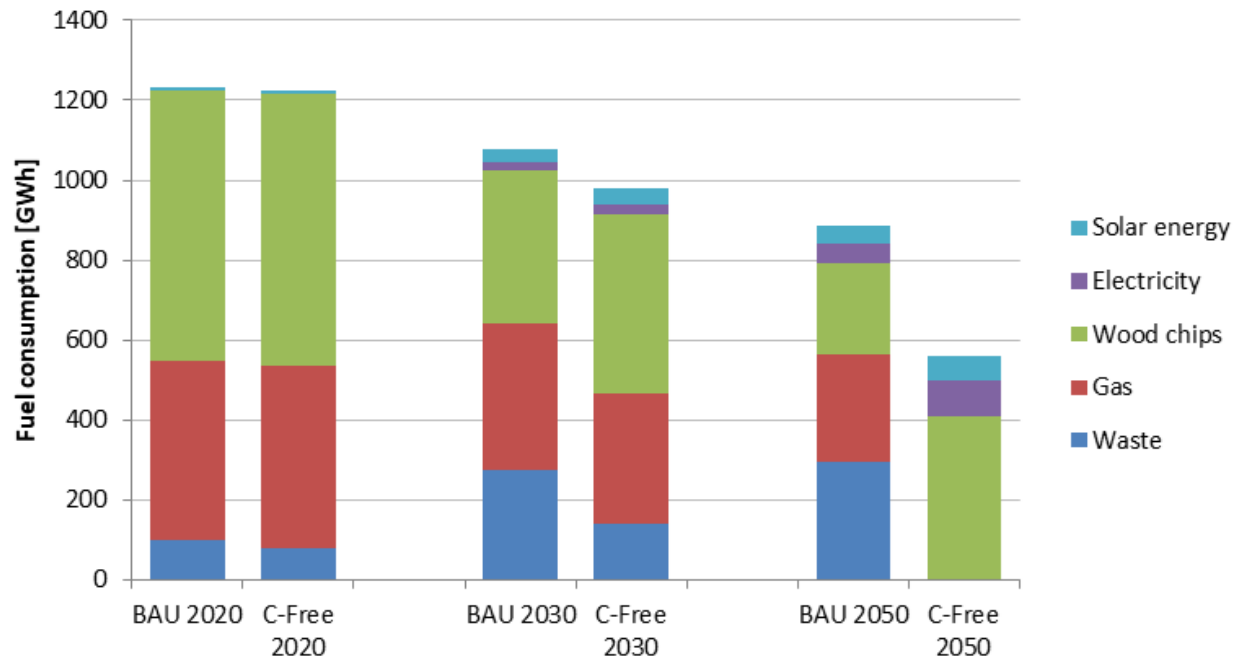

- In C-free scenario, natural gas is abandoned and replaced by mainly wood chips. Also heat pumps and solar heat become more common.



Kaunas results and findings

- The common trend for both scenarios is the decommissioning of excess (mainly natural gas) capacities:
 - expected decrease of energy demands due to efficiency improvements (deep renovation of buildings)
 - the development of heat storages might allow for peak shaving and decreasing needs for investment in peaking capacities.
- The new investments in the Kaunas DH scenarios analyzed are made mainly to replace part of existing capacities after the end of their lifetime.
- In both scenarios, investments are put to biomass heat only boilers, but there is also a considerable capacity of new gas-fired boilers installed (in C-Free scenario they are used for reservation only). Solar collectors receive some investment, but their share in the capacity structure remains modest.
- The capacity of waste-to-energy CHP is lower than expected (up to 60 MW_{th} in BAU and 34 MW_{th} in the C-Free scenario) due to relatively low heat demand during summer. In the case of C-Free scenario, accounting of GHG emissions decreases the attractiveness of waste as an energy resource.
- The main difference between the modelled scenarios is a high penetration of steam-driven absorption heat pumps in C-Free scenario (65 MW_{th} of total installed capacity in C-Free scenario in 2050 compared to 15 MW_{th} in BAU in the same year).



Case Helsinki metropolitan area

- Market share of DH is > 90 % in Finnish cities
- In Helsinki, CHP is important:
 - Salmisaari coal-fired CHP plant 160/300 MWe/MWth
 - Hanasaari coal-fired CHP plant 220/420 MWe/MWth, *to be closed in 2024*
 - Vuosaari natural-gas fired CHP plant 650/600 MWe/MWth
 - In addition, heat-only boilers (mainly gas), large heat pump in Katri Vala 170 MW_{heat} / 70 MW_{cool} and cold-water storages for district cooling use.
- Similar DH structures in Espoo and Vantaa. In Vantaa, also a modern waste-CHP plant exists, 920 GWh heat and 600 GWh electricity (natural gas as support fuel) .



Studied DH scenarios for Helsinki region

2030


- Finland has recently introduced law which requires abandoning coal use in energy generation by 2029.
- We assume that coal is replaced by wood (50%) and natural gas (50%).
- A new waste CHP plant is built (heat output 140 MW, electricity output 75 MW).
- Use of waste heat is increased to 15%.

2050

- Natural gas and oil replaced by wood (60%) and heat pumps (40%).
- Geothermal energy unit built in Helsinki (heat output 40 MW).
- Capacity of solar thermal increased to 270 MW.
- Utilization of waste heat increased to 20% of heat demand.



Modelling results for Helsinki region

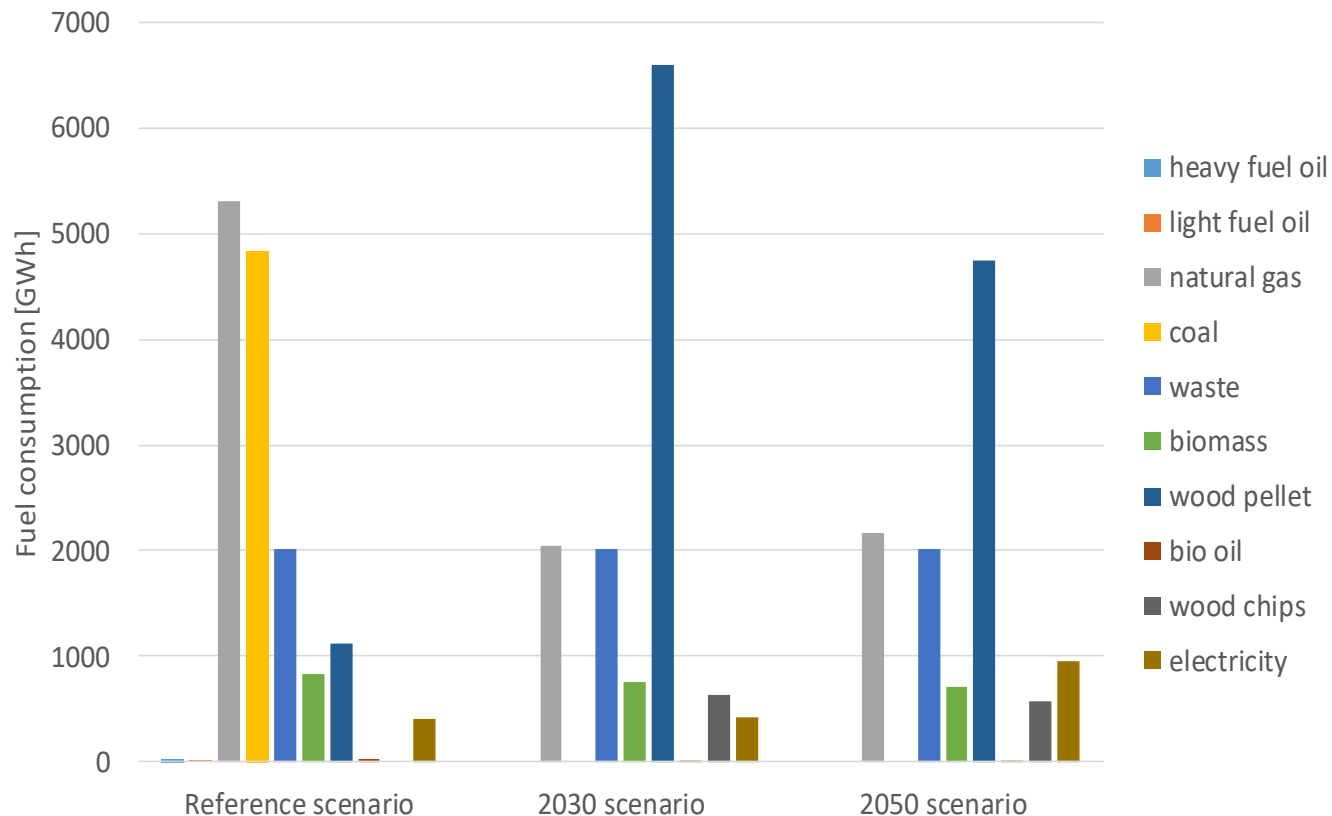

- Waste and wood fuels and geothermal heat become important by 2050.
- With stringent climate targets, natural gas with CCS will be used as well.



Findings on Helsinki scenarios

- According to modelling results, DH production costs would only increase modestly in ambitious low-carbon scenarios compared to already presently agreed city-level and national policies. Average heat production cost in 2050 is 58 €/MWh compared to 50 €/MWh in Reference scenario.
- In Finnish electricity market area, electricity prices will be more volatile in future due to strongly increasing wind power in Sweden and Finland
=> Heat storages are especially suitable: use of either heat pumps or CHP according to electricity market situation limits DH price increases. Heat storages are rather cheap.



Case Warsaw

- The share of district heating is about 80% in Warsaw.
- Warsaw and whole Poland are using extensively domestic coal in electricity and heat production. Presently in Warsaw there are for example Zeran 386/1580 MWe/MWth and Siekierki 620/2078 MWe/MWth coal-fired CHP plants.
- At present, co-firing of biomass is being prepared for Zeran and Siekierki. There are also plans for a new waste-to-energy plant and to replace aging boilers by natural gas.



Studied DH scenarios for Warsaw

2030 DH scenario


- Oil replaced by gas-fired CHP.
- Solar thermal capacity increased to 190 MW.

2050 DH scenario

- Coal use is abandoned.
- Heat capacity of gas-fired plants equipped with CCS is increased to 480 MW, electrical capacity to 240 MW.
- Increased utilization of geothermal heat (heat output 810 MW).
- Heat capacity of biomass-fired CHP plants increased to 1800 MW, electrical capacity to 770 MW.
- Heat capacity of biomass-fired HOBs increased to 1000 MW.
- Heat capacity of waste-fired CHP plants increased to 280 MW, electrical capacity to 70 MW.
- Capacity of heat pumps increased to 150 MW.
- Solar thermal capacity increased to 430 MW.



Modelling results for Warsaw

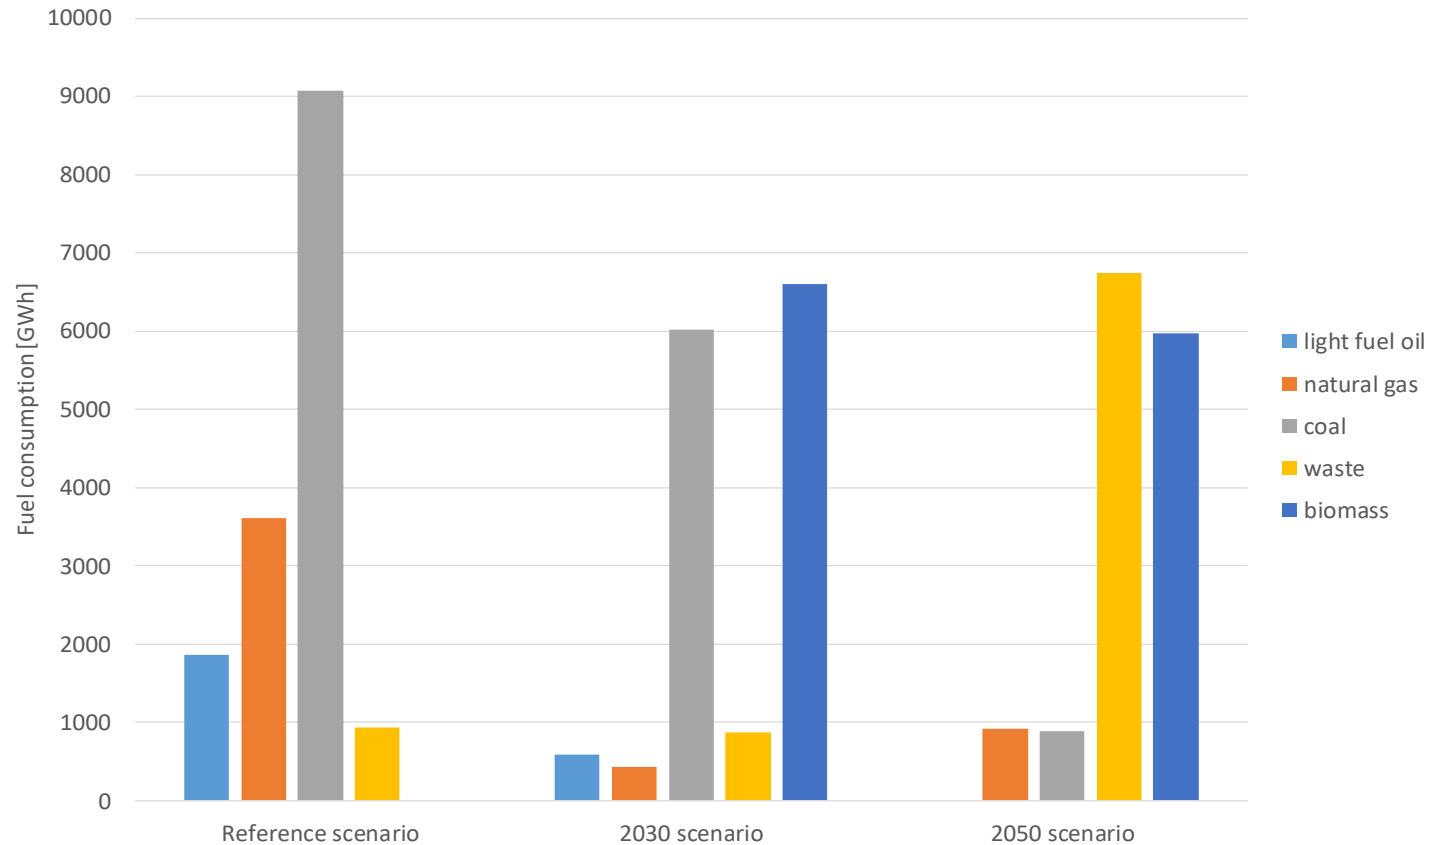

- Coal is used extensively in Warsaw. In low-CO2 scenarios, coal is mostly replaced by waste and biomass fuels.



Specific issues in Warsaw

- Warsaw and whole Poland are using extensively domestic coal in electricity and heat production.
- ⇒ Transition to low-carbon district heating increases costs especially in Warsaw. In low-carbon scenario, heat production cost could be about 90 €/MWh, compared to 66 €/MWh in Reference scenario.
- This can have significant adverse impacts as increasing energy poverty.




Key findings from city-level modelling

- In Helsinki region emissions could be cut by 90% by 2050 and the average heat production costs increased only by 16%.
- In Warsaw emissions were cut by 75% by 2050 and the average heat production costs increased by 40%.
- In Kaunas emissions could be cut from 0.102 MtCO₂ to 0.087 MtCO₂ with cost increase of 29% and to zero with cost increase of 55%.
- In Helsinki region, heat production with wood and waste fuels as well as utilization of geothermal and waste heat become important by 2050.
- In Warsaw, heat pumps were profitable in 2030 and 2050 scenarios in traditional electricity price scenario.
- In Warsaw, heat production with biomass, waste and electricity increases by 2050.
- Heat storages were profitable investments in almost all cases, bringing system cost saving of about 3-6%.



Energy poverty indicator: situation currently

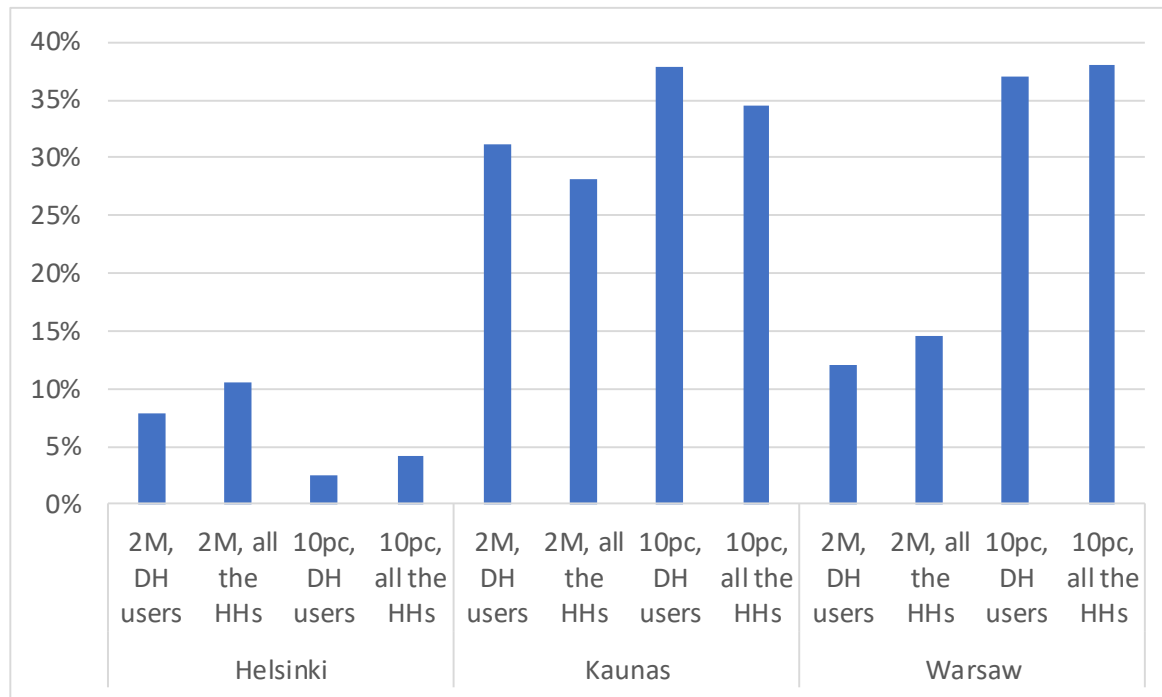

- In Helsinki region, only 4% of households spend > 10% of income on energy.
- Already at present, in Kaunas 34% and in Warsaw 38% spend > 10% of income on energy.
- Energy poverty may increase significantly with ambitious emission reduction measures in DH systems.



Publications

- Joint conference paper (Aalto, LEI) published in SDEWES conference in 2017: Hast, Aira; Syri, Sanna; Lekavičius, Vidas; Galinis, Arvydas, District heating in cities as a part of low-carbon energy system.
- Extended to Journal article: Hast, Aira; Syri, Sanna; Lekavičius, Vidas; Galinis, Arvydas, Energy 2018. **District heating in cities as a part of low-carbon energy system.**
- Conference paper (Aalto, USTUTT, DTU) in EEM conference in Lodz, Poland 2017: Hast, A., Syri, S., Welsch, J., Korkmaz, P. & Balyk, O., 2018, 15th International Conference on the European Energy Market (EEM). **Transition to carbon neutral energy systems – implications to district heating in cities.**



Thank you for your attention!



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 691739.

